

Toipack II plus

Type corresponding to the battery for



DC12V [With 10 m of cigar plug correspondence code • Battery correspondence (with a clamp)]



HAMA ELECTRONICS Co., LTD

A power failure or suspension of water supply!

→ Use of a flush lavatory cannot be performed.



Toilet → All are solved by Toipack II !!!

It is pack processing about filth for every use.

→ it does not stink – sanitary – always beautiful Processing is easy.

Old portable toilets

→ Dirty – smell and processing are after others very much...

NO!

It installs in a Japanese-style toilet.

The tent for disasters (Option article)

Toipack II plus is installed It is the completion of installation at about 1~2 minutes.

→ A single room (Japanese-style toilet) can be used. A toilet bowl is made to straddle and installation is possible.



When there is no Japanese-style toilet,

it is tent installation for disasters to the corner of an evacuation area.

It is an installation (tent which specialized in disasters) option article in a tent.

When a car can be brought

When a car cannot be brought

When electricity can be used

Cigar socket

The battery for cars

Home electric socket





DC12V



DC12V



AC100V (100-240V)

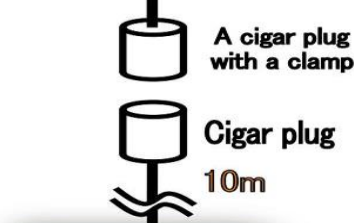

Engine halt condition
The number of times of continuous use
About 60 times



The number of times of continuous use
About 200 times



Toipack II plus

Battery protection feature.....If voltage residual quantity decreases, a machine will stop.

Please use changing into a new battery and car. (Please put an engine into operation and charge.)

Reference data : Car battery[40B19R]

The number of times increases with a battery with large capacity.